

09/297899

PCT/SE 99/00540

**PRV**PATENT- OCH REGISTRERINGSVERKET  
Patentavdelningen

REC'D 18 MAY 1999

WIPO PCT

**Intyg  
Certificate**

Härmed intygas att bifogade kopior överensstämmer med de handlingar som ursprungligen ingivits till Patent- och registreringsverket i nedannämnda ansökan.

*Ansökan ingavs ursprungligen på engelska.*

*This is to certify that the annexed is a true copy of the documents as originally filed with the Patent- and Registration Office in connection with the following patent application.*

*The application was originally filed in English.*

(71) Sökande                      Astra AB, Södertälje SE  
Applicant (s)

(21) Patentansökningsnummer    9801122-4  
Patent application number

(86) Ingivningsdatum                      1998-03-30  
Date of filing

Stockholm, 1999-05-10

För Patent- och registreringsverket  
For the Patent- and Registration Office

*Evy Morin*  
Evy Morin

Avgift  
Fee

**PRIORITY  
DOCUMENT**

SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

## INHALATION DEVICE

The present invention relates to a powder inhaler for administering powder by inhalation.

5 A number of powder inhalers are known which use different systems for introducing a dose of powder into an air stream. Typically, the powder is inhaled into the lungs of a patient in order to treat, for example, asthma.

10 One such powder inhaler is disclosed in EP-A-0237507. This inhaler comprises an inhalation channel and a mouthpiece comprising an air chamber and an outlet nozzle, which inhalation channel and mouthpiece together define a flow path through which a stream of air is drawn during inhalation by a user. This inhaler further comprises means for introducing powder into the inhalation channel. During inhalation, air is first drawn into and through the inhalation channel so as to pick up powder. The stream of air  
15 containing powder is then drawn through the air chamber and out of the outlet nozzle of the mouthpiece. This inhaler still further comprises an indicating wheel having marking on the periphery thereof for providing an indication as to the usage of the inhaler.

20 Although the above-described known powder inhaler functions quite adequately, it is an aim of the present invention to provide a powder inhaler having an electronic dose counter for providing the user with a precise indication of either the number of doses used or the number of doses remaining.

25 Accordingly, the present invention provides a powder inhaler for administering powder by inhalation, comprising: an inhalation channel; a rotatable dosing unit including at least one dosing means for providing a dose of powder to the inhalation channel; and a dose counting unit comprising an electronic display, an electrical circuit for counting each dose of powder provided to the inhalation channel and driving the display so as to provide an indication as to the usage of the inhaler, the electrical circuit including at least one switch each comprising a  
30 contact element which is in use closed when a dose of powder is provided to the inhalation

channel, and a rotatable member connected to the dosing unit so as to be rotatable therewith, the rotatable member having at least one cam surface which each includes at least one cam projection, each cam projection on each cam surface being configured, on rotation of the dosing unit to provide a dose of powder to the inhalation channel, so as to deflect the contact  
5 element of the respective one of the at least one switch and close the same.

Preferably, the electrical circuit includes a first switch comprising a first contact element and a second switch comprising a second contact element, and the rotatable member includes first and second cam surfaces each including at least one cam projection for deflecting  
10 respectively the first and second contact elements so as to close the first and second switches.

Preferably, the dosing unit includes a plurality of dosing means and each cam surface includes a plurality of cam projections having the same angular spacing as the dosing means in the dosing unit.  
15

More preferably, the plurality of dosing means in the dosing unit and the plurality of cam projections on each cam surface are angularly equi-spaced.

Preferably, the corresponding cam projections on the first and second cam surfaces are  
20 rotationally offset in relation to one another such that one of the first and second switches is made before the other.

More preferably, the cam projections on the first and second cam surfaces are rotationally offset such that, on rotation of the rotatable member, in a first phase of rotation one of the first and second switches is closed and the other of the first and second switches is open, in a  
25 second phase of rotation the first and second switches are closed, in a third phase of rotation the one of the first and second switches is open and the other of the first and second switches is closed, and in a fourth phase of rotation the first and second switches are open, and the electrical circuit is configured to count only when this sequence of closing and opening the  
30 first and second switches is followed.

Preferably, each contact element is a resiliently-biased arm having a first part which rides on the respective cam surface and a second part which provides a contact pad.

- 5 More preferably, the arm is resilient and is configured such that the second part thereof which provides a contact pad moves at least partly laterally over a contact surface when the first part thereof rides onto and over a cam projection.

10 More preferably, the arm includes a bend, the outer surface of which provides the second part thereof that rides on the respective cam surface.

Preferably, the dosing unit includes a shaft having a surface provided with one of at least one of an external or internal spline and the rotatable member has a surface provided with the other of at least one of an external or internal spline, the splines being engaged such that the dosing unit and the rotatable member in use rotate concomitantly.

In one embodiment the electrical circuit is configured to drive the display to display the number of doses used.

- 20 In another embodiment the electrical circuit is configured to drive the display to display the number of doses remaining.

Preferably, the electrical circuit is configured to drive the display to display intermittently the number of doses remaining when a predetermined number of doses or less are remaining.

25 Preferably, the display is a liquid crystal display.

Preferably, the inhaler further comprises a rotatable grip portion which is in use gripped by a user and when rotated in one sense rotates the dosing unit to provide a dose of powder to the inhalation channel.

By virtue of the present invention, the user is provided by an accurate and reliable indication as to the usage of the inhaler.

- 5 The powder inhaler of the present invention may be used with any suitable form of powder, including powders introduced into the air stream in the raw state or as conglomerate, micronised or ordered mixture particles. Furthermore, the active ingredient or ingredients of the powder may be diluted with one or more substances such as lactose and may include substances for the treatment of various conditions, not necessarily respiratory conditions.
- 10 Indeed, the powder can include genetic material and need not be restricted to human use only.

Medicaments suitable for administration by the powder inhaler of the present invention are any which may be delivered by inhalation and include for example  $\beta$ 2-adrenoreceptor agonists, for example, salbutamol, terbutaline, rimeterol, fenoterol, reproterol, adrenaline,

15 pirbuterol, isoprenaline, orciprenaline, bitolterol, salmeterol, formoterol, clenbuterol, procaterol, broxaterol, picumeterol, TA-2005, mabuterol and the like, and their pharmacologically acceptable esters and salts; anticholinergic bronchodilators, for example, ipratropium bromide and the like; glucocorticosteroids, for example, beclomethasone, fluticasone, budesonide, tipredane, dexamethasone, betamethasone,

20 fluocinolone, triamcinolone acetonide, mometasone and the like, and their pharmacologically acceptable esters and salts; antiallergic medicaments, for example, sodium cromoglycate and nedocromil sodium; expectorants; mucolytics; antihistamines; cyclooxygenase inhibitors; leukotriene synthesis inhibitors; leukotriene antagonists; phospholipase-A2 (PLA2) inhibitors; platelet aggregating factor (PAF) antagonists and

25 prophylactics of asthma; antiarrhythmic medicaments; tranquilisers; cardiac glycosides; hormones; antihypertensive medicaments; antidiabetic medicaments; antiparasitic medicaments; anticancer medicaments; sedatives; analgesic medicaments; antibiotics; antirheumatic medicaments; immunotherapies; antifungal medicaments; antihypotension

medicaments; vaccines; antiviral medicaments; proteins; polypeptides and peptides, for example, peptide hormones and growth factors; polypeptide vaccines; enzymes; endorphines; lipoproteins and polypeptides involved in the blood coagulation cascade; vitamins; and others, for example, cell surface receptor blockers, antioxidants, free radical  
5 scavengers and organic salts of N, N'- diacetylcystine.

A preferred embodiment of the present invention will now be described hereinbelow by way of example only with reference to the accompanying drawings, in which:

10 Figure 1 illustrates a perspective view of a powder inhaler in accordance with a preferred embodiment of the present invention;

Figure 2(a) illustrates in part exploded view the powder inhaler of Figure 1;

15 Figure 2(b) illustrates a vertical sectional view (along section A-A in Figure 2(a)) of the mouthpiece of the inhaler of Figure 1;

Figure 3 illustrates in exploded view the component parts disposed within the inhaler body of the inhaler of Figure 1;

20

Figures 4(a) and (b) illustrate respectively side and plan views of the dosing unit of the inhaler of Figure 1;

25

Figure 4(c) illustrates a vertical sectional view (along section A-A) of the dosing unit of Figure 4(a);

Figure 4(d) illustrates in enlarged scale a plan view of the central shaft of the dosing unit of Figure 4(a);

Figures 5(a) to (e) illustrate respectively front, rear, side, plan and underneath plan views of the body part of the dose counting unit of the inhaler of Figure 1;

Figure 5(f) illustrates a vertical sectional view (along section A-A in Figure 5(a)) of the body part of Figures 5(a) to (e);

Figure 5(g) illustrates a horizontal sectional view (along section B-B in Figure 5(b)) of the body part of Figures 5(a) to (e);

Figures 6(a) to (d) illustrate respectively one side, other side, plan and underneath plan views of the rotor of the dose counting unit of the inhaler of Figure 1;

Figure 6(e) illustrates a vertical sectional view (along section A-A in Figure 6(a)) of the rotor of Figures 6(a) to (d);

Figures 7(a) to (c) illustrate respectively end, side and plan views of the conductive member of the electrical device of the inhaler of Figure 1;

Figures 8(a) to (c) illustrate respectively rear, side and plan views of the further conductive member of the inhaler of Figure 1;

Figures 9(a) to (c) illustrate respectively front, one side and other side views of the dose counting unit of the inhaler of Figure 1;

Figure 9(d) illustrates a horizontal sectional view (along section BB-BB in Figure 9(a)) of the dose counting unit of Figures 9(a) to (c);

Figure 9(e) illustrates a horizontal sectional view (along section CC-CC in Figure 9(a)) of the dose counting unit of Figures 9(a) to (c);

Figure 9(f) illustrates a horizontal sectional view (along section DD-DD in Figure 9(a)) of the dose counting unit of Figures 9(a) to (c);

Figure 10(a) illustrates a side view of the inhaler body of the inhaler of Figure 1, with the internal components disposed therein;

Figure 10(b) illustrates a vertical sectional view (along section FF-FF) of the inhaler body of Figure 10(a);

Figure 10(c) illustrates a horizontal sectional view (along section AA-AA) of the inhaler body of Figure 10(a);

Figure 10(d) illustrates a horizontal sectional view (along section BB-BB) of the inhaler body of Figure 10(a);

Figure 10(e) illustrates a horizontal sectional view (along section CC-CC) of the inhaler body of Figure 10(a); and

Figure 10(f) illustrates a horizontal sectional view (along section DD-DD) of the inhaler body of Figure 10(a).

The inhaler comprises a mouthpiece 2, an inhaler body 3 and a rotatable grip portion 4 for operating a dosing mechanism for providing doses of powder for inhalation.

The inhaler body 3 comprises a generally cylindrical tubular member 5 capped by a divider 6, which in this embodiment are integrally formed. For aesthetic reasons the inhaler body 3 is an opaque moulding. The tubular member 5 includes a first opening 7 which acts as a supplementary air inlet and a second opening 8 through which an electronic display 57 is visible for providing an indication as to the usage of the inhaler. The divider 6 includes a first opening 9 which is in communication with the first opening 7 in the tubular member 5



and acts as a supplementary air inlet and second and third openings 10, 11 into which extend an inhalation channel 24 and a storage chamber 28 as will be described in more detail hereinbelow.

5 Within the inhaler body 3 are housed the component parts of the delivery mechanism. These component parts include a dosing unit 16 which comprises a member 17 having a planar upper surface in which a plurality of dosing means 18 are provided and a shaft 20 which extends axially from the centre of the member 17, an inhalation unit 22 which comprises an inhalation channel 24 and a storage unit 26 which comprises a storage  
10 chamber 28 for storing powder. The above-mentioned component parts of the delivery mechanism are assembled by passing the inhalation channel 24 through an opening 30 in the storage unit 26 and passing the shaft 20 through central openings 32, 34 in the inhalation unit 22 and the storage unit 26 respectively. When so assembled, the upper ends of the inhalation channel 24 and the storage chamber 28 pass respectively through the  
15 second and third openings 10, 11 in the divider 6. In this way, the inhalation unit 22 and the storage unit 26 are fixed in position in relation to one another and the dosing unit 16 can be rotated relative thereto.

Figures 4(a) to (d) illustrate the dosing unit 16. The dosing unit 16 comprises a plurality of  
20 dosing means 18, each in the form of a plurality of through holes, which are equi-spaced circularly about the central shaft 20. In this embodiment the dosing unit 16 includes five dosing means 18 which are angularly spaced apart from one another by an angle of 72 degrees. The dosing unit 16 further comprises a plurality of wedge-shaped elements 36, in the same number and spacing as the dosing means 18, disposed around the outer periphery  
25 of the member 17. Each wedge-shaped element 36 has a first, axially-directed surface 36a which faces in one sense, in this embodiment in the clockwise sense when viewed from above, and a second surface 36b having a component which faces in the opposite sense, in this embodiment in the counter-clockwise sense when viewed from above. In use, the dosing unit 16 is rotated by rotating the grip portion 4 in the opposite sense, that is the  
30 counter-clockwise sense when viewed from above, the grip portion 4 including a resilient

member (not illustrated) which is configured to engage with the axially-directed surface 36a of a respective one of the wedge-shaped elements 36 so as to rotate the dosing unit 16 between first and second angularly-spaced positions, in this embodiment positions angularly spaced 72 degrees apart, by pushing the respective wedge-shaped element 36.

5 On rotation of the grip portion 4 in the one sense, that is the clockwise sense when viewed from above, between the second and the first angularly-spaced positions, the dosing unit 16 remains stationary and the resilient member is located behind the axially-directed surface 36a of the adjacent wedge-shaped element 36; the resilient member riding over the second surface 36b of the adjacent wedge-shaped element 36. Further, in this embodiment, the  
10 central shaft 20 comprises a first, lower part 20a, the outer surface of which is generally cylindrical and acts as a bearing surface in the central openings 32, 34 in the inhalation unit 22 and the storage unit 26, and a second, upper part 20b which is of smaller radial dimension than the first part 20a and includes a plurality of external splines 38 on the outer surface thereof.

15

In this embodiment the storage unit 28 is open at the bottom such that in use powder is provided to the dosing unit 16 under the action of gravity and the inhalation unit 22 further comprises scrapers 40 which are resiliently biased against the upper surface of the member 17 in which the dosing means 18 are provided. In this way, as the dosing unit 16 is rotated,  
20 the dosing means 18 are filled with powder by the scrapers 40. Powder is prevented from passing through the dosing means 18 by a plate (not illustrated) which is disposed beneath the dosing unit 16.

25

Within the inhaler body 3 is also housed a dose counting unit 42 for counting the number of operations of the grip portion 4 in providing doses of powder to the inhalation channel 24. The dose counting unit 42 is located on the storage unit 26 between the inhalation channel 24 and the storage chamber 28.

30

The dose counting unit 42 comprises a body part 43 (as illustrated in Figures 5(a) to (g)) having a cavity 44 in which is mounted a rotor 45 (as illustrated in Figures 6(a) to (e)). The

rotor 45 comprises a hollow shaft 46 having first and second bearing surfaces 47, 48 at opposed ends thereof, which first and second bearing surfaces 47, 48 are configured to fit respectively within lower and upper recesses 49, 50 in opposed surfaces of the cavity 44. The first bearing surface 47 and the lower recess 49 are of different, in this embodiment larger, dimension than the second bearing surface 48 and the upper recess 50 so as to ensure that the rotor 45 is fitted in the cavity 44 with the correct orientation. The outer surface of the shaft 46 includes first and second axially-spaced cam surfaces 51, 52, each including a plurality of radial cam projections 51a, 52a of the same number. The cam projections 51a, 52a on the first and second cam surfaces 51, 52 have rounded distal ends and are circumferentially equi-spaced. In this embodiment each cam surface 51, 52 includes five cam projections 51a, 52a which are angularly spaced apart from one another by an angle of 72 degrees, with the corresponding cam projections 51a, 52a on the first and second cam surfaces 51, 52 being angularly shifted by a predetermined angle, typically about 18 degrees, such that the cam projections 51a on the first cam surface 51 are forward of the corresponding cam projections 52a on the second cam surface 52 in the sense of rotation, in this embodiment in the counter-clockwise sense when viewed from above. The inner surface of the shaft 46 includes a plurality of internal splines 54 which are configured to receive the external splines 38 on the upper part 20b of the shaft 20 of the dosing unit 16 so as rotationally to fix the rotor 45 relative to the dosing unit 16, whereby the rotor 45 is rotated concomitantly with the dosing unit 16. In this embodiment the splines 38, 54 are not a tight fit but rather have a limited freedom of movement so as to allow for relatively easy inter-engagement thereof. In rotationally fixing the dosing unit 16 and the rotor 45 using splines 38, 54, as compared for example to forming the dosing unit 16 integrally with the rotor 45, a certain degree of tolerance is provided since the position of the rotor 45 which includes the cam surfaces 51, 52 is not dependent upon the position of the dosing unit 16.

The dose counting unit 42 further comprises an electrical device 55 comprising a printed circuit board 56 mounted to the body part 43, the printed circuit board 56 having an integrated circuit for counting input pulses corresponding to the number of operations of

the grip portion 4 in providing doses of powder to the inhalation channel 24 and driving an electronic display 57, an electronic display 57, in this embodiment a liquid crystal display, for displaying either the number of doses of powder provided to the inhalation channel 24 or the number of doses of powder remaining in the storage chamber 28 connected to one  
5 side 56a of the printed circuit board 56 by first and second elastomeric conducting elements 58 (so-called zebra strips), and a conductive member 59 connected to the other side 56b of the printed circuit board 56. The conductive member 59 is a gold-plated element and comprises a resilient arm 59a which is configured to contact one of the terminals, in this embodiment the anode terminal, of a battery cell 64. The electrical device 55 further  
10 comprises a further conductive member 60 which is mounted to the body part 43. The further conductive member 60 is a gold-plated element and comprises a first resilient arm 61 which is configured to contact the other of the terminals, in this embodiment the cathode terminal, of a battery cell 64 and includes a contact pad 61a which contacts the respective terminal on the printed circuit board 56, a second resilient arm 62 which acts as  
15 a first switch element and a third resilient arm 63 which acts as a second switch element. The second and third arms 62, 63 are identical in shape and include a bend 62a, 63a which encloses an acute angle, in this embodiment of about 72 degrees, with the bend 62a, 63a defining a knee which is acted upon by a respective one of the first and second cam surfaces 51, 52 of the rotor 45 as will be described in detail hereinbelow. The distal ends  
20 of the second and third arms 62, 63 each include contact pads 62b, 63b for contacting a respective contact on the printed circuit board 56 for making first and second switches.

The dose counting unit 42 yet further comprises a battery cell 64 which is disposed in a further cavity 65 in the body part 43. The battery cell 64 is arranged such that the anode and cathode terminals thereof contact respectively the arm 59a of the one conductive  
25 member 59 and the first arm 61 of the further conductive member 60.

The dose counting unit 42 still further comprises a window 66, in this embodiment formed of a transparent plastics material, which is fixed to the body part 43, preferably by clipping.

The window 66 fills the second opening 8 in the tubular member 5 of the inhaler body 3 so as to protect the electronic display 57 therebehind.

As illustrated in Figures 1 and 2(a), the mouthpiece 2 is fixed to the divider 6. The mouthpiece 2 comprises first and second parts 67, 68, the first part 67 being the part which is gripped by the lips of a user and includes an outlet opening 69 through which air containing powder is in use drawn on inhalation by a user and the second part 68 being an insert fitted within the first part 67. The second part 68 comprises a tubular section 70, which includes one or more spirally or helically shaped projections 71 that act to deflect the air drawn therethrough and thereby deagglomerate any larger particles of entrained powder, and a substantially radially-directed flange 72 which defines the upper surface of an air chamber that is in fluid communication with the inhalation channel 24 through which air containing powder is drawn on inhalation by a user.

The inhaler further comprises a cover plate 74 which is located above the divider 6. The cover plate 74 includes first and second openings 75, 76 which correspond respectively to the inhalation channel 24 and the supplementary air inlet 9. The cover plate 74 further comprises a member 78 which is configured to contact a part of the lower surface of the flange 72 defining the upper surface of the air chamber. In this embodiment the member 78 is integrally formed with the cover plate 74 and comprises an arm which is formed of resilient material and acts as a scraper. In use, on rotating the mouthpiece 2 relative to the inhaler body 3, the lower surface of the flange 72 is rotated relative to the member 78 thereby causing powder which may have accumulated on that part of the lower surface of the flange 72 immediately upstream of the member 78 in a rotational sense to be removed.

In use, as described hereinabove, powder is transferred from the storage chamber 28 to one of the dosing means 18, and, with rotation of the dosing unit 16, the one dosing means 18 provides a dose of powder to the inhalation channel 24. The dosing unit 16 is rotated by rotating the grip portion 4 in the counter-clockwise sense between first and second angularly-spaced positions. Initially, prior to first use of the inhaler, the display 57 displays

a flashing symbol, typically a minus sign, and the user is required to operate the grip portion 4 a predetermined number of times, typically three or four times, so as to prime the dosing means 18 in the dosing unit 16. When so primed, the display 57, which in this embodiment displays the number of doses remaining, displays an initial value which  
5 corresponds to the number of doses of powder stored in the storage chamber 28. In this state the inhaler is ready for use and subsequently after each operation of the grip portion 4 the display 57 decrements by one. Further, as a warning to the user, the value displayed on the display 57 flashes when a predetermined number of doses of powder, typically 20 doses, or less are remaining. It will of course be understood that in an alternative  
10 embodiment the display 57 could initially, after priming of the inhaler, display zero and thereafter display the number of times the grip portion 4 is operated.

On rotating the grip portion 4 between the first and second angularly-spaced positions the dosing unit 16 and the rotor 45 which is rotationally fixed thereto are rotated through the  
15 same angle, in this embodiment an angle of 72 degrees. In a first phase of this angular rotation of the rotor 45 the bend 62b in the second arm 62 of the further conductive member 60 which rides on the first cam surface 51 of the rotor 45 rides up onto one of the cam projections 51a on that cam surface 51 causing the bend 62a and hence the distal end of the second arm 62 to be deflected outwardly such that the contact pad 62b contacts a  
20 contact on the printed circuit board 56 so as to make a first switch. Whilst making contact with the contact on the printed circuit board 56, the contact pad 62b moves laterally thereover so as to ensure a good contact even if, for example, powder had deposited on the contact. In a second phase of this angular rotation of the rotor 45, with the bend 62a in the second arm 62 of the further conductive member 60 on the one of the cam projections 51a  
25 on the first cam surface 51 and the contact pad 62b contacting the one contact on the printed circuit board 56, the bend 63b in the third arm 63 of the further conductive member 60 which rides on the second cam surface 52 of the rotor 45 rides up onto the corresponding one of the cam projections 52a on that cam surface 52 causing the bend 63a and hence the distal end of the third arm 63 to be deflected outwardly such that the contact  
30 pad 63b contacts another contact on the printed circuit board 56 so as to make a second

switch. Similarly to the contact pad 62b of the second arm 62, whilst making contact with the respective contact on the printed circuit board 56, the contact pad 63b of the third arm 63 moves laterally thereover so as to ensure a good contact. In a third phase of this rotation of the rotor 45, with the bend 63a in the third arm 63 of the further conductive member 60  
5 on the one of the cam projections 52a on the second cam surface 52 and the contact pad 63b contacting the other contact on the printed circuit board 56, the bend 62a in the second arm 62 of the further conductive member 60 rides off the one of the cam projections 51a on the first cam surface 51 whereby the bend 62a and hence the distal end of the second arm 62 move inwardly such that the contact pad 62b no longer contacts the one contact on the  
10 printed circuit board 56 so as to open the first switch. In a fourth phase of this rotation of the rotor 45 the bend 63a in the third arm 63 of the further conductive member 60 rides off the one of the cam projections 52a on the second cam surface 52 whereby the bend 63a and hence the distal end of the third arm 63 move inwardly such that the contact pad 63b no longer contacts the other contact on the printed circuit board 56 so as to open the second  
15 switch. In this way, on rotating the grip portion 4 of the inhaler to provide a dose of powder to the inhalation channel 24, the switches provided by the second and third arms 62, 63 follow the sequence open-open, closed-open, closed-closed, open-closed and open-open. In this embodiment the electrical device 55 is configured to count only when the above sequence is followed.

20

In providing the electrical device 55 of the dose counting unit 42 with two switches which have to be closed in order for the operation of the grip portion 4 to be counted, the dose counting circuit is more reliable than if the electrical device 55 were to include only one switch since there is a much reduced risk of two switches as opposed to one switch being  
25 inadvertently made to record a count if the inhaler were subjected to a sudden shock, for example, as when dropped on a hard surface. Further, by configuring the dose counting circuit only to count when the switches follow the above-mentioned sequence, it is possible to ensure that the dose counting circuit does not erroneously count as may happen if the dose counting circuit were configured to count merely when both switches were

simultaneously made which although unlikely may possibly occur if the inhaler were to experience a sudden shock, for example, as when dropped onto a hard surface.

Finally, it will be understood by a person skilled in the art that the present invention has been  
5 described in its preferred embodiments and can be modified in many different ways without departing from the scope of the invention as defined in the appended claims.

1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60  
61  
62  
63  
64  
65  
66  
67  
68  
69  
70  
71  
72  
73  
74  
75  
76  
77  
78  
79  
80  
81  
82  
83  
84  
85  
86  
87  
88  
89  
90  
91  
92  
93  
94  
95  
96  
97  
98  
99  
100  
101  
102  
103  
104  
105  
106  
107  
108  
109  
110  
111  
112  
113  
114  
115  
116  
117  
118  
119  
120  
121  
122  
123  
124  
125  
126  
127  
128  
129  
130  
131  
132  
133  
134  
135  
136  
137  
138  
139  
140  
141  
142  
143  
144  
145  
146  
147  
148  
149  
150  
151  
152  
153  
154  
155  
156  
157  
158  
159  
160  
161  
162  
163  
164  
165  
166  
167  
168  
169  
170  
171  
172  
173  
174  
175  
176  
177  
178  
179  
180  
181  
182  
183  
184  
185  
186  
187  
188  
189  
190  
191  
192  
193  
194  
195  
196  
197  
198  
199  
200  
201  
202  
203  
204  
205  
206  
207  
208  
209  
210  
211  
212  
213  
214  
215  
216  
217  
218  
219  
220  
221  
222  
223  
224  
225  
226  
227  
228  
229  
230  
231  
232  
233  
234  
235  
236  
237  
238  
239  
240  
241  
242  
243  
244  
245  
246  
247  
248  
249  
250  
251  
252  
253  
254  
255  
256  
257  
258  
259  
260  
261  
262  
263  
264  
265  
266  
267  
268  
269  
270  
271  
272  
273  
274  
275  
276  
277  
278  
279  
280  
281  
282  
283  
284  
285  
286  
287  
288  
289  
290  
291  
292  
293  
294  
295  
296  
297  
298  
299  
300  
301  
302  
303  
304  
305  
306  
307  
308  
309  
310  
311  
312  
313  
314  
315  
316  
317  
318  
319  
320  
321  
322  
323  
324  
325  
326  
327  
328  
329  
330  
331  
332  
333  
334  
335  
336  
337  
338  
339  
340  
341  
342  
343  
344  
345  
346  
347  
348  
349  
350  
351  
352  
353  
354  
355  
356  
357  
358  
359  
360  
361  
362  
363  
364  
365  
366  
367  
368  
369  
370  
371  
372  
373  
374  
375  
376  
377  
378  
379  
380  
381  
382  
383  
384  
385  
386  
387  
388  
389  
390  
391  
392  
393  
394  
395  
396  
397  
398  
399  
400  
401  
402  
403  
404  
405  
406  
407  
408  
409  
410  
411  
412  
413  
414  
415  
416  
417  
418  
419  
420  
421  
422  
423  
424  
425  
426  
427  
428  
429  
430  
431  
432  
433  
434  
435  
436  
437  
438  
439  
440  
441  
442  
443  
444  
445  
446  
447  
448  
449  
450  
451  
452  
453  
454  
455  
456  
457  
458  
459  
460  
461  
462  
463  
464  
465  
466  
467  
468  
469  
470  
471  
472  
473  
474  
475  
476  
477  
478  
479  
480  
481  
482  
483  
484  
485  
486  
487  
488  
489  
490  
491  
492  
493  
494  
495  
496  
497  
498  
499  
500  
501  
502  
503  
504  
505  
506  
507  
508  
509  
510  
511  
512  
513  
514  
515  
516  
517  
518  
519  
520  
521  
522  
523  
524  
525  
526  
527  
528  
529  
530  
531  
532  
533  
534  
535  
536  
537  
538  
539  
540  
541  
542  
543  
544  
545  
546  
547  
548  
549  
550  
551  
552  
553  
554  
555  
556  
557  
558  
559  
560  
561  
562  
563  
564  
565  
566  
567  
568  
569  
570  
571  
572  
573  
574  
575  
576  
577  
578  
579  
580  
581  
582  
583  
584  
585  
586  
587  
588  
589  
590  
591  
592  
593  
594  
595  
596  
597  
598  
599  
600  
601  
602  
603  
604  
605  
606  
607  
608  
609  
610  
611  
612  
613  
614  
615  
616  
617  
618  
619  
620  
621  
622  
623  
624  
625  
626  
627  
628  
629  
630  
631  
632  
633  
634  
635  
636  
637  
638  
639  
640  
641  
642  
643  
644  
645  
646  
647  
648  
649  
650  
651  
652  
653  
654  
655  
656  
657  
658  
659  
660  
661  
662  
663  
664  
665  
666  
667  
668  
669  
670  
671  
672  
673  
674  
675  
676  
677  
678  
679  
680  
681  
682  
683  
684  
685  
686  
687  
688  
689  
690  
691  
692  
693  
694  
695  
696  
697  
698  
699  
700  
701  
702  
703  
704  
705  
706  
707  
708  
709  
710  
711  
712  
713  
714  
715  
716  
717  
718  
719  
720  
721  
722  
723  
724  
725  
726  
727  
728  
729  
730  
731  
732  
733  
734  
735  
736  
737  
738  
739  
740  
741  
742  
743  
744  
745  
746  
747  
748  
749  
750  
751  
752  
753  
754  
755  
756  
757  
758  
759  
760  
761  
762  
763  
764  
765  
766  
767  
768  
769  
770  
771  
772  
773  
774  
775  
776  
777  
778  
779  
780  
781  
782  
783  
784  
785  
786  
787  
788  
789  
790  
791  
792  
793  
794  
795  
796  
797  
798  
799  
800  
801  
802  
803  
804  
805  
806  
807  
808  
809  
810  
811  
812  
813  
814  
815  
816  
817  
818  
819  
820  
821  
822  
823  
824  
825  
826  
827  
828  
829  
830  
831  
832  
833  
834  
835  
836  
837  
838  
839  
840  
841  
842  
843  
844  
845  
846  
847  
848  
849  
850  
851  
852  
853  
854  
855  
856  
857  
858  
859  
860  
861  
862  
863  
864  
865  
866  
867  
868  
869  
870  
871  
872  
873  
874  
875  
876  
877  
878  
879  
880  
881  
882  
883  
884  
885  
886  
887  
888  
889  
890  
891  
892  
893  
894  
895  
896  
897  
898  
899  
900  
901  
902  
903  
904  
905  
906  
907  
908  
909  
910  
911  
912  
913  
914  
915  
916  
917  
918  
919  
920  
921  
922  
923  
924  
925  
926  
927  
928  
929  
930  
931  
932  
933  
934  
935  
936  
937  
938  
939  
940  
941  
942  
943  
944  
945  
946  
947  
948  
949  
950  
951  
952  
953  
954  
955  
956  
957  
958  
959  
960  
961  
962  
963  
964  
965  
966  
967  
968  
969  
970  
971  
972  
973  
974  
975  
976  
977  
978  
979  
980  
981  
982  
983  
984  
985  
986  
987  
988  
989  
990  
991  
992  
993  
994  
995  
996  
997  
998  
999  
1000  
1001  
1002  
1003  
1004  
1005  
1006  
1007  
1008  
1009  
1010  
1011  
1012  
1013  
1014  
1015  
1016  
1017  
1018  
1019  
1020  
1021  
1022  
1023  
1024  
1025  
1026  
1027  
1028  
1029  
1030  
1031  
1032  
1033  
1034  
1035  
1036  
1037  
1038  
1039  
1040  
1041  
1042  
1043  
1044  
1045  
1046  
1047  
1048  
1049  
1050  
1051  
1052  
1053  
1054  
1055  
1056  
1057  
1058  
1059  
1060  
1061  
1062  
1063  
1064  
1065  
1066  
1067  
1068  
1069  
1070  
1071  
1072  
1073  
1074  
1075  
1076  
1077  
1078  
1079  
1080  
1081  
1082  
1083  
1084  
1085  
1086  
1087  
1088  
1089  
1090  
1091  
1092  
1093  
1094  
1095  
1096  
1097  
1098  
1099  
1100  
1101  
1102  
1103  
1104  
1105  
1106  
1107  
1108  
1109  
1110  
1111  
1112  
1113  
1114  
1115  
1116  
1117  
1118  
1119  
1120  
1121  
1122  
1123  
1124  
1125  
1126  
1127  
1128  
1129  
1130  
1131  
1132  
1133  
1134  
1135  
1136  
1137  
1138  
1139  
1140  
1141  
1142  
1143  
1144  
1145  
1146  
1147  
1148  
1149  
1150  
1151  
1152  
1153  
1154  
1155  
1156  
1157  
1158  
1159  
1160  
1161  
1162  
1163  
1164  
1165  
1166  
1167  
1168  
1169  
1170  
1171  
1172  
1173  
1174  
1175  
1176  
1177  
1178  
1179  
1180  
1181  
1182  
1183  
1184  
1185  
1186  
1187  
1188  
1189  
1190  
1191  
1192  
1193  
1194  
1195  
1196  
1197  
1198  
1199  
1200  
1201  
1202  
1203  
1204  
1205  
1206  
1207  
1208  
1209  
1210  
1211  
1212  
1213  
1214  
1215  
1216  
1217  
1218  
1219  
1220  
1221  
1222  
1223  
1224  
1225  
1226  
1227  
1228  
1229  
1230  
1231  
1232  
1233  
1234  
1235  
1236  
1237  
1238  
1239  
1240  
1241  
1242  
1243  
1244  
1245  
1246  
1247  
1248  
1249  
1250  
1251  
1252  
1253  
1254  
1255  
1256  
1257  
1258  
1259  
1260  
1261  
1262  
1263  
1264  
1265  
1266  
1267  
1268  
1269  
1270  
1271  
1272  
1273  
1274  
1275  
1276  
1277  
1278  
1279  
1280  
1281  
1282  
1283  
1284  
1285  
1286  
1287  
1288  
1289  
1290  
1291  
1292  
1293  
1294  
1295  
1296  
1297  
1298  
1299  
1300  
1301  
1302  
1303  
1304  
1305  
1306  
1307  
1308  
1309  
1310  
1311  
1312  
1313  
1314  
1315  
1316  
1317  
1318  
1319  
1320  
1321  
1322  
1323  
1324  
1325  
1326  
1327  
1328  
1329  
1330  
1331  
1332  
1333  
1334  
1335  
1336  
1337  
1338  
1339  
1340  
1341  
1342  
1343  
1344  
1345  
1346  
1347  
1348  
1349  
1350  
1351  
1352  
1353  
1354  
1355  
1356  
1357  
1358  
1359  
1360  
1361  
1362  
1363  
1364  
1365  
1366  
1367  
1368  
1369  
1370  
1371  
1372  
1373  
1374  
1375  
1376  
1377  
1378  
1379  
1380  
1381  
1382  
1383  
1384  
1385  
1386  
1387  
1388  
1389  
1390  
1391  
1392  
1393  
1394  
1395  
1396  
1397  
1398  
1399  
1400  
1401  
1402  
1403  
1404  
1405  
1406  
1407  
1408  
1409  
1410  
1411  
1412  
1413  
1414  
1415  
1416  
1417  
1418  
1419  
1420  
1421  
1422  
1423  
1424  
1425  
1426  
1427  
1428  
1429  
1430  
1431  
1432  
1433  
1434  
1435  
1436  
1437  
1438  
1439  
1440  
1441  
1442  
1443  
1444  
1445  
1446  
1447  
1448  
1449  
1450  
1451  
1452  
1453  
1454  
1455  
1456  
1457  
1458  
1459  
1460  
1461  
1462  
1463  
1464  
1465  
1466  
1467  
1468  
1469  
1470  
1471  
1472  
1473  
1474  
1475  
1476  
1477  
1478  
1479  
1480  
1481  
1482  
1483  
1484  
1485  
1486  
1487  
1488  
1489  
1490  
1491  
1492  
1493  
1494  
1495  
1496  
1497  
1498  
1499  
1500  
1501  
1502  
1503  
1504  
1505  
1506  
1507  
1508  
1509  
1510  
1511  
1512  
1513  
1514  
1515  
1516  
1517  
1518  
1519  
1520  
1521  
1522  
1523  
1524  
1525  
1526  
1527  
1528  
1529  
1530  
1531  
1532  
1533  
1534  
1535  
1536  
1537  
1538  
1539  
1540  
1541  
1542  
1543  
1544  
1545  
1546  
1547  
1548  
1549  
1550  
1551  
1552  
1553  
1554  
1555  
1556  
1557  
1558  
1559  
1560  
1561  
1562  
1563  
1564  
1565  
1566  
1567  
1568  
1569  
1570  
1571  
1572  
1573  
1574  
1575  
1576  
1577  
1578  
1579  
1580  
1581  
1582  
1583  
1584  
1585  
1586  
1587  
1588  
1589  
1590  
1591  
1592  
1593  
1594  
1595  
1596  
1597  
1598  
1599  
1600  
1601  
1602  
1603  
1604  
1605  
1606  
1607  
1608  
1609  
1610  
1611  
1612  
1613  
1614  
1615  
1616  
1617  
1618  
1619  
1620  
1621  
1622  
1623  
1624  
1625  
1626  
1627  
1628  
1629  
1630  
1631  
1632  
1633  
1634  
1635  
1636  
1637  
1638  
1639  
1640  
1641  
1642  
1643  
1644  
1645  
1646  
1647  
1648  
1649  
1650  
1651  
1652  
1653  
1654  
1655  
1656  
1657  
1658  
1659  
1660  
1661  
1662  
1663  
1664  
1665  
1666  
1667  
1668  
1669  
1670  
1671  
1672  
1673  
1674  
1675  
1676  
1677  
1678  
1679  
1680  
1681  
1682  
1683  
1684  
1685  
1686  
1687  
1688  
1689  
1690  
1691  
1692  
1693  
1694  
1695  
1696  
1697  
1698  
1699  
1700  
1701  
1702  
1703  
1704  
1705  
1706  
1707  
1708  
1709  
1710  
1711  
1712  
1713  
1714  
1715  
1716  
1717  
1718  
1719  
1720  
1721  
1722  
1723  
1724  
1725  
1726  
1727  
1728  
1729  
1730  
1731  
1732  
1733  
1734  
1735  
1736  
1737  
1738  
1739  
1740  
1741  
1742  
1743  
1744  
1745  
1746  
1747  
1748  
1749  
1750  
1751  
1752  
1753  
1754  
1755  
1756  
1757  
1758  
1759  
1760  
1761  
1762  
1763  
1764  
1765  
1766  
1767  
1768  
1769  
1770  
1771  
1772  
1773  
1774  
1775  
1776  
1777  
1778  
1779  
1780  
1781  
1782  
1783  
1784  
1785  
1786  
1787  
1788  
1789  
1790  
1791  
1792  
1793  
1794  
1795  
1796  
1797  
1798  
1799  
1800  
1801  
1802  
1803  
1804  
1805  
1806  
1807  
1808  
1809  
1810  
1811  
1812  
1813  
1814  
1815  
1816  
1817  
1818  
1819  
1820  
1821  
1822  
1823  
1824  
1825  
1826  
1827  
1828  
1829  
1830  
1831  
1832  
1833  
1834  
1835  
1836  
1837  
1838  
1839  
1840  
1841  
1842  
1843  
1844  
1845  
1846  
1847  
1848  
1849  
1850  
1851  
1852  
1853  
1854  
1855  
1856  
1857  
1858  
1859  
1860  
1861  
1862  
1863  
1864  
1865  
1866  
1867  
1868  
1869  
1870  
1871  
1872  
1873  
1874  
1875  
1876  
1877  
1878  
1879  
1880  
1881  
1882  
1883  
1884  
1885  
1886  
1887  
1888  
1889  
1890  
1891  
1892  
1893  
1894  
1895  
1896  
1897  
1898  
1899  
1900  
1901  
1902  
1903  
1904  
1905  
1906  
1907  
1908  
1909  
1910  
1911  
1912  
1913  
1914  
1915  
1916  
1917  
1918  
1919  
1920  
1921  
1922  
1923  
1924  
1925  
1926  
1927  
1928  
1929  
1930  
1931  
1932  
1933  
1934  
1935  
1936  
1937  
1938  
1939  
1940  
1941  
1942  
1943  
1944  
1945  
1946  
1947  
1948  
1949  
1950  
1951  
1952  
1953  
1954  
1955  
1956  
1957  
1958  
1959  
1960  
1961  
1962  
1963  
1964  
1965  
1966  
1967  
1968  
1969  
1970  
1971  
1972  
1973  
1974  
1975  
1976  
1977  
1978  
1979  
1980  
1981  
1982  
1983  
1984  
1985  
1986  
1987  
1988  
1989  
1990  
1991  
1992  
1993  
1994  
1995  
1996  
1997  
1998  
1999  
2000  
2001  
2002  
2003  
2004  
2005  
2006  
2007  
2008  
2009  
2010  
2011  
2012  
2013  
2014  
2015  
2016  
2017  
2018  
2019  
2020  
2021  
2022  
2023  
2024  
2025  
2026  
2027  
2028  
2029  
2030  
2031  
2032  
2033  
2034  
2035  
2036  
2037  
2038  
2039  
2040  
2041  
2042  
2043  
2044  
2045  
2046  
2047  
2048  
2049  
2050  
2051  
2052  
2053  
2054  
2055  
2056  
2057  
2058  
2059  
2060  
2061  
2062  
2063  
2064  
2065  
2066  
2067  
2068  
2069  
2070  
2071  
2072  
2073  
2074  
2075  
2076  
2077  
2078  
2079  
2080  
2081  
2082  
2083  
2084  
2085  
2086  
2087  
2088  
2089  
2090  
2091  
2092  
2093  
2094  
2095  
2096  
2097  
2098  
2099  
2100  
2101  
2102  
2103  
2104  
2105  
2106  
2107  
2108  
2109  
2110  
2111  
2112  
2113  
2114  
2115  
2116  
2117  
2118  
2119  
2120  
2121  
2122  
2123  
2124  
2125  
2126  
2127  
2128  
2129  
2130  
2131  
2132  
2133  
2134  
2135  
2136  
2137  
2138  
2139  
2140  
2141  
2142  
2143  
2144  
2145  
2146  
2147  
2148  
2149  
2150  
2151  
2152  
2153  
2154  
2155  
2156  
2157  
2158  
2159  
2160  
2161  
2162  
2163  
2164  
2165  
2166  
2167  
2168  
2169  
2170  
2171  
2172  
2173  
2174  
2175  
2176  
2177  
2178  
2179  
2180  
2181  
2182  
2183  
2184  
2185  
2186  
2187  
2188  
2189  
2190  
2191  
2192  
2193  
2194  
2195  
2196  
2197  
2198  
2199  
2200  
2201  
220



## CLAIMS

1. A powder inhaler for administering powder by inhalation, comprising: an inhalation channel (24); a rotatable dosing unit (16) including at least one dosing means (18) for providing a dose of powder to the inhalation channel (24); and a dose counting unit (42) comprising an electronic display (57), an electrical circuit for counting each dose of powder provided to the inhalation channel (24) and driving the display (57) so as to provide an indication as to the usage of the inhaler, the electrical circuit including at least one switch each comprising a contact element which is closed when a dose of powder is provided to the inhalation channel (24), and a rotatable member (45) connected to the dosing unit (16) so as to be rotatable therewith, the rotatable member (45) having at least one cam surface (51, 52) which each includes at least one cam projection (51a, 52a), each cam projection (51a, 52a) on each cam surface (51, 52) being configured, on rotation of the dosing unit (16) to provide a dose of powder to the inhalation channel (24), so as to deflect the contact element of the respective one of the at least one switch and close the same.
2. The inhaler of claim 1, wherein the electrical circuit includes a first switch comprising a first contact element and a second switch comprising a second contact element, and the rotatable member (45) includes first and second cam surfaces (51, 52) each including at least one cam projection (51a, 52a) for deflecting respectively the first and second contact elements so as to close the first and second switches.
3. The inhaler of claim 1 or 2, wherein the dosing unit (16) includes a plurality of dosing means (18) and each cam surface (51, 52) includes a plurality of cam projections (51a, 52a) having the same angular spacing as the dosing means (18) in the dosing unit (16).
4. The inhaler of claim 3, wherein the plurality of dosing means (18) in the dosing unit (16) and the plurality of cam projections (51a, 52a) on each cam surface (51, 52) are angularly equi-spaced.

5. The inhaler of claim 2 or claim 3 or 4 when appendant upon claim 2, wherein the corresponding cam projections (51a, 52a) on the first and second cam surfaces (51, 52) are rotationally offset in relation to one another such that one of the first and second switches is made before the other.
6. The inhaler of claim 5, wherein the cam projections (51a, 52a) on the first and second cam surfaces (51, 52) are rotationally offset such that, on rotation of the rotatable member (45), in a first phase of rotation one of the first and second switches is closed and the other of the first and second switches is open, in a second phase of rotation the first and second switches are closed, in a third phase of rotation the one of the first and second switches is open and the other of the first and second switches is closed, and in a fourth phase of rotation the first and second switches are open, and the electrical circuit is configured to count only when this sequence of closing and opening the first and second switches is followed.
7. The inhaler of any of claims 1 to 6, wherein each contact element is a resiliently-biased arm (62, 63) having a first part which rides on the respective cam surface (51, 52) and a second part which provides a contact pad (62b, 63b).
8. The inhaler of claim 7, wherein the arm (62, 63) is resilient and is configured such that the second part thereof which provides a contact pad (62b, 63b) moves at least partly laterally over a contact surface when the first part thereof rides onto and over a cam projection (51a, 52a).
9. The inhaler of claim 7 or 8, wherein the arm (62, 63) includes a bend (62a, 63a), the outer surface of which rides on the respective cam surface (51, 52).
10. The inhaler of any of claims 1 to 9, wherein the dosing unit (16) includes a shaft (20) having a surface provided with one of at least one of an external or internal spline (38)


and the rotatable member (45) has a surface provided with the other of at least one of an external or internal spline (54), the splines (38, 54) being engaged such that the dosing unit (16) and the rotatable member (45) in use rotate concomitantly.

- 5 11. The inhaler of any of claims 1 to 10, wherein the electrical circuit is configured to drive the display (57) to display the number of doses used.
12. The inhaler of any of claims 1 to 10, wherein the electrical circuit is configured to drive the display (57) to display the number of doses remaining.
- 10 13. The inhaler of claim 12, wherein the electrical circuit is configured to drive the display (57) to display intermittently the number of doses remaining when a predetermined number of doses or less are remaining.
- 15 14. The inhaler of any of claims 1 to 13, wherein the display (57) is a liquid crystal display.
15. The inhaler of any of claims 1 to 14, further comprising a rotatable grip portion (4) which is in use gripped by a user and when rotated in one sense rotates the dosing unit (16) to provide a dose of powder to the inhalation channel (24).

## ABSTRACT

## INHALATION DEVICE

5 A powder inhaler for administering powder by inhalation, comprising: an inhalation channel (24); a rotatable dosing unit (16) including at least one dosing means (18) for providing a dose of powder to the inhalation channel (24); and a dose counting unit (42) comprising an electronic display (57), an electrical circuit for counting each dose of powder provided to the inhalation channel (24) and driving the display (57) so as to provide an indication as to the  
10 usage of the inhaler, the electrical circuit including at least one switch each comprising a contact element which is in use closed when a dose of powder is provided to the inhalation channel (24), and a rotatable member (45) connected to the dosing unit (16) so as to be rotatable therewith, the rotatable member (45) having at least one cam surface (51, 52) which each includes at least one cam projection (51a, 52a), each cam projection (51a, 52a) on each  
15 cam surface (51, 52) being configured, on rotation of the dosing unit (16) to provide a dose of powder to the inhalation channel (24), so as to deflect the contact element of the respective one of the at least one switch and close the same.

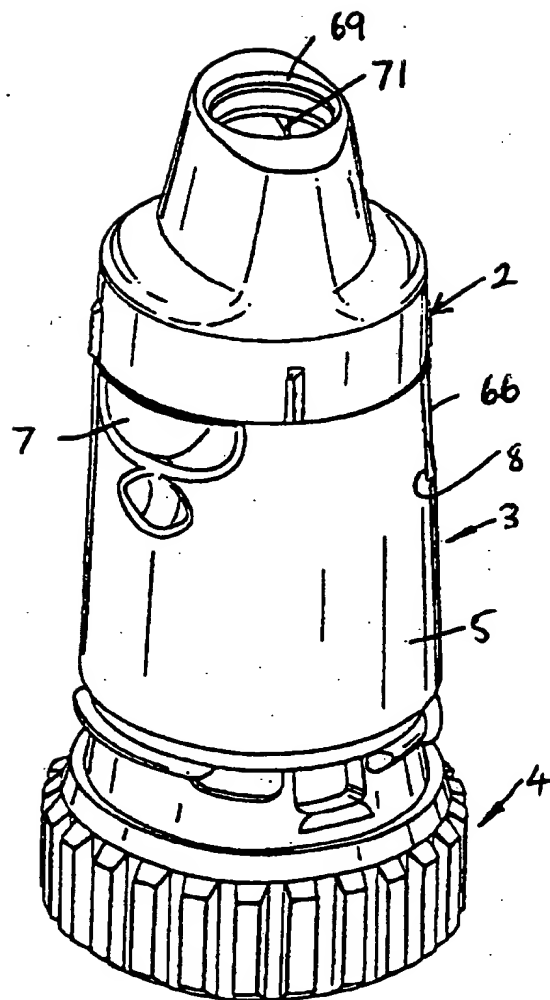FIG. 1

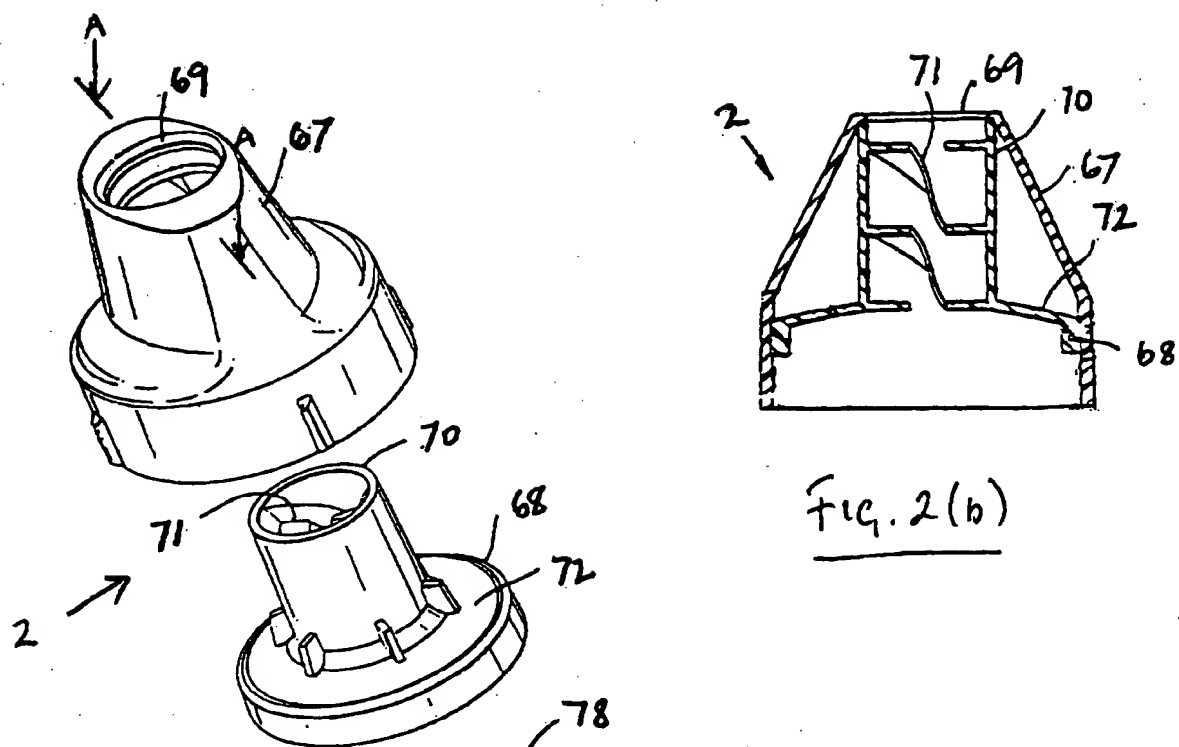


Fig. 2(b)

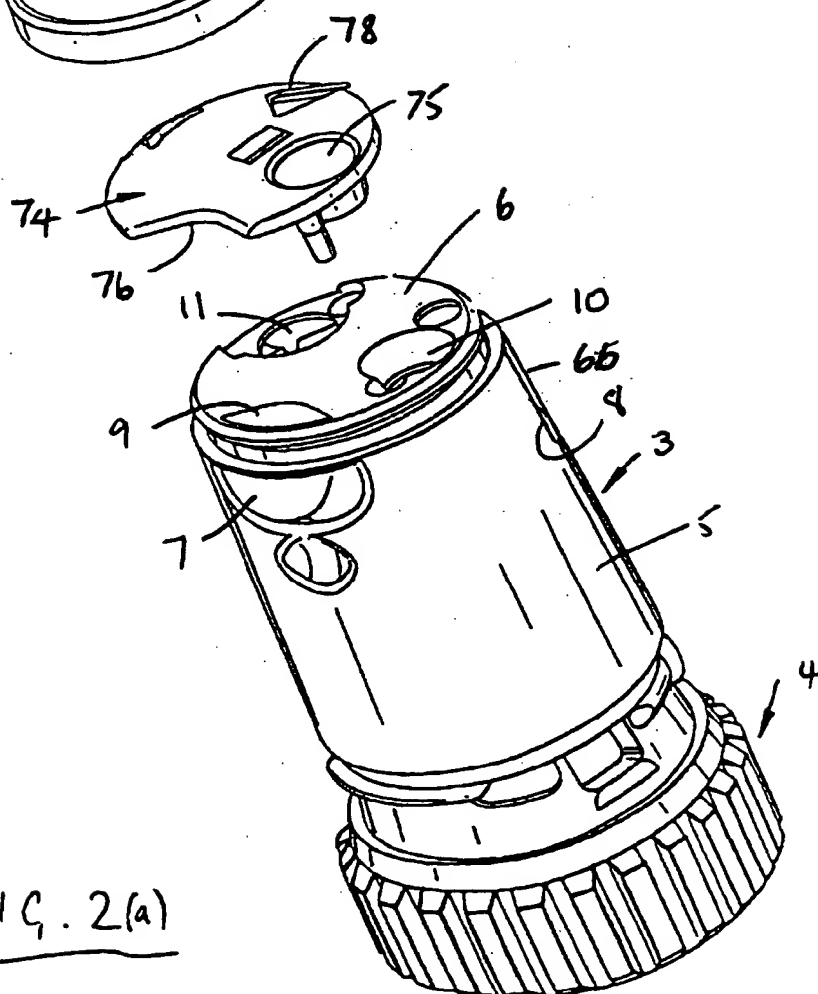


FIG. 2(a)

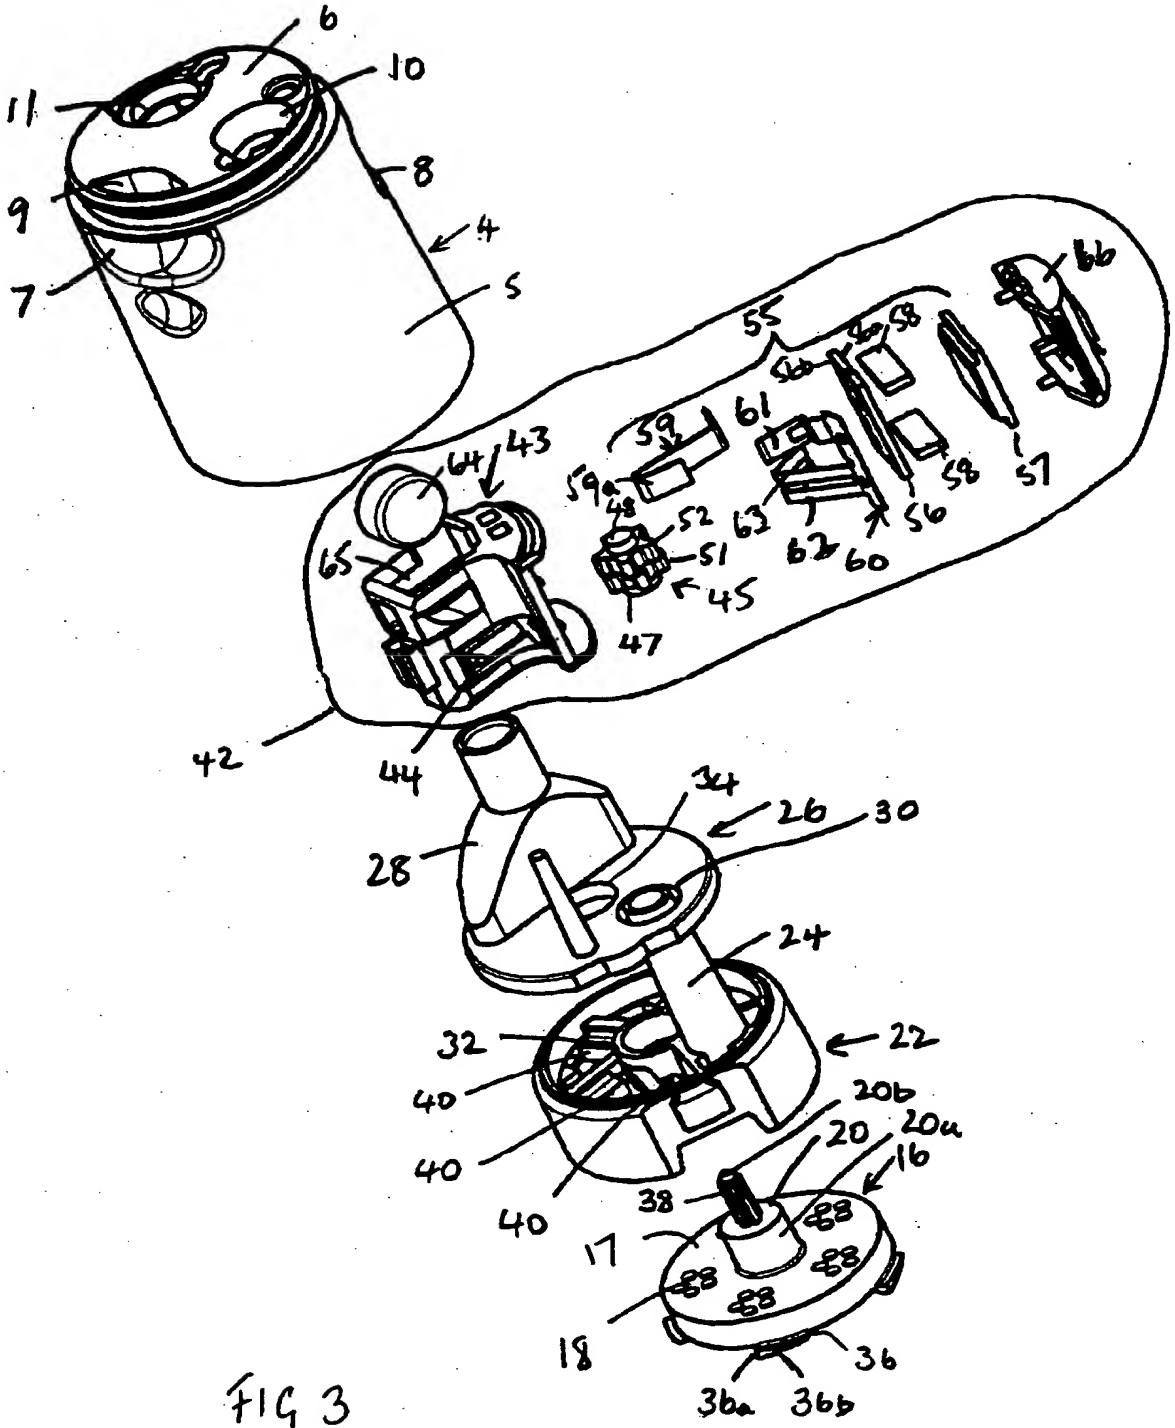


FIG 3

FIG. 4(d)

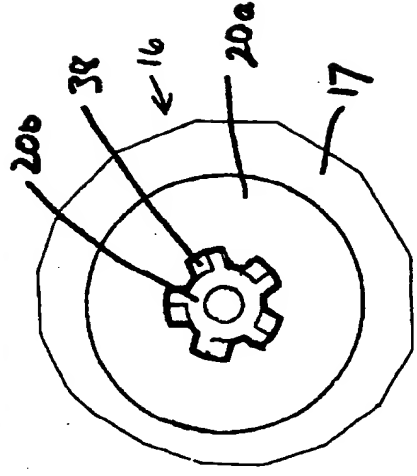


FIG. 4(a)

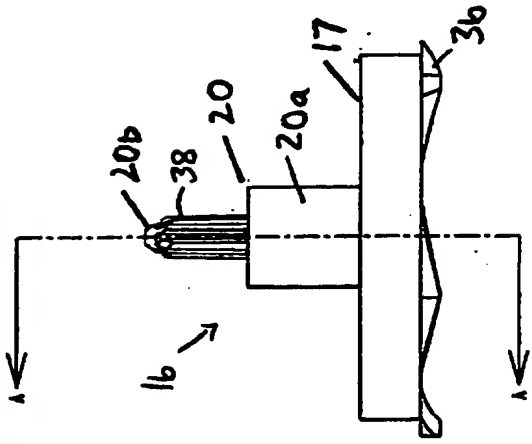


FIG. 4(c)

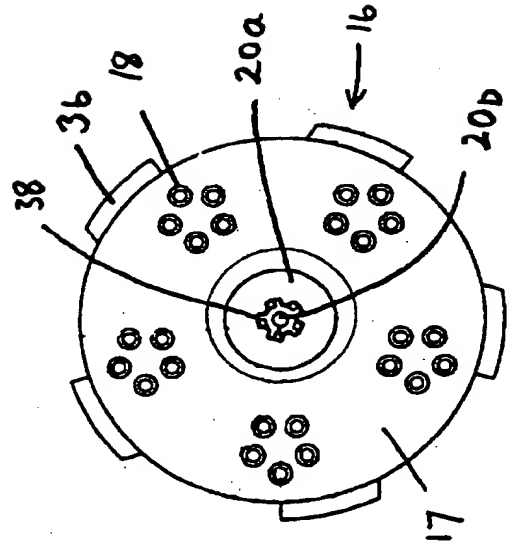
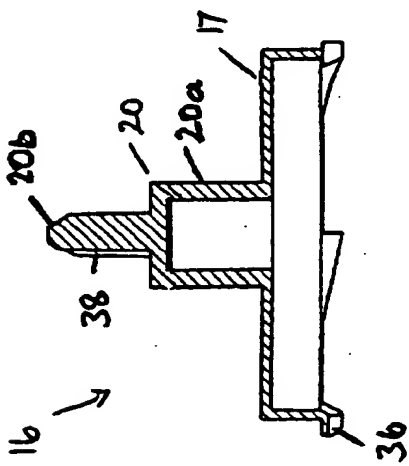
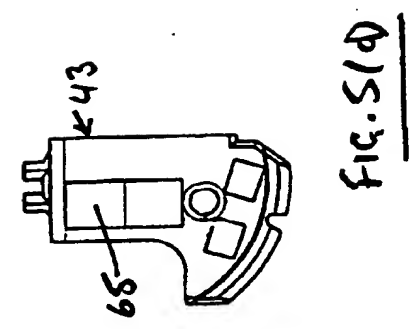
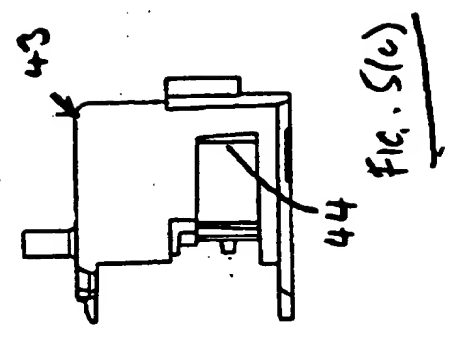
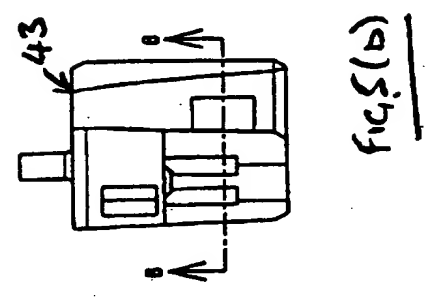
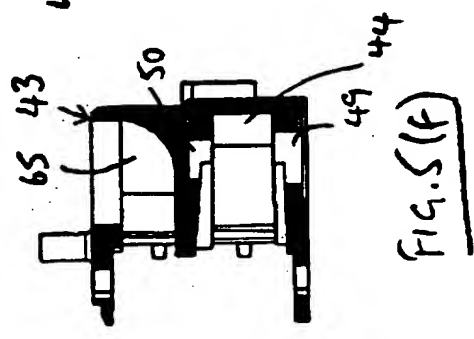
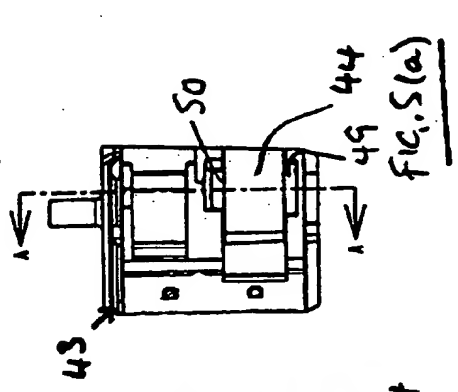
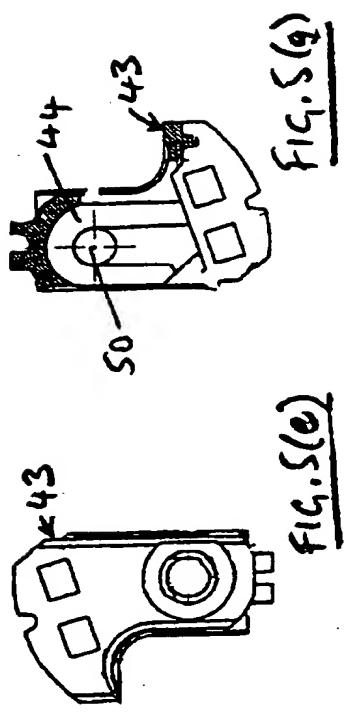
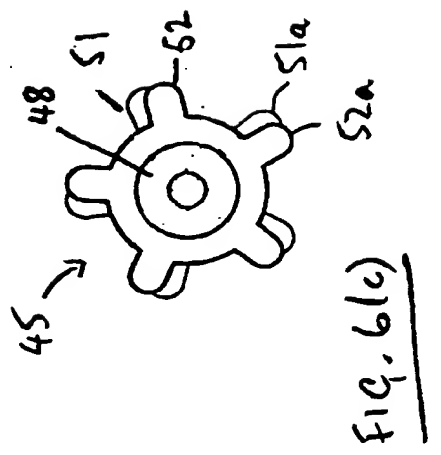
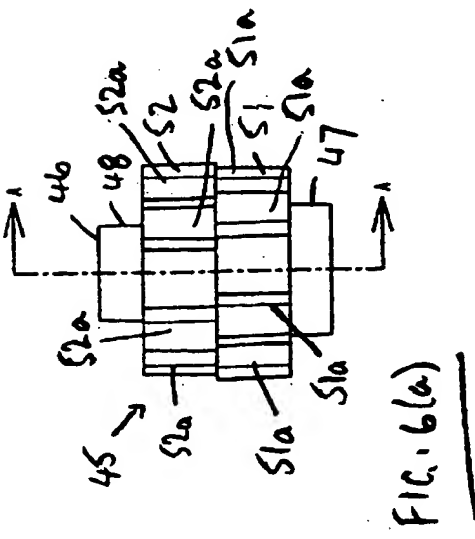
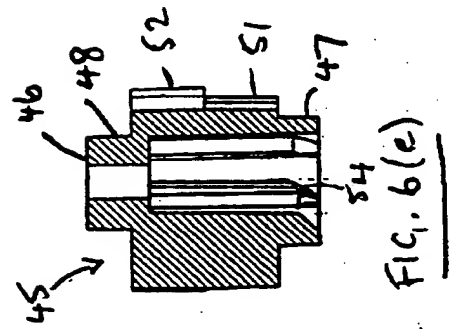
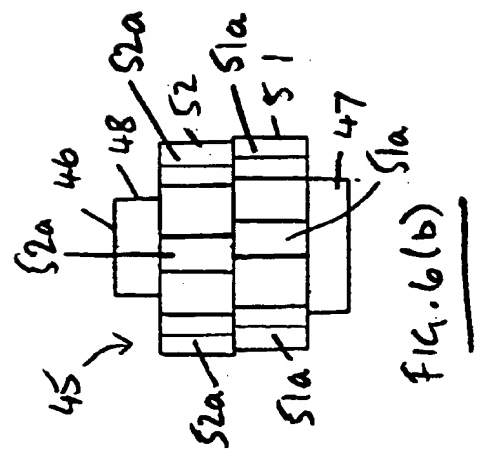
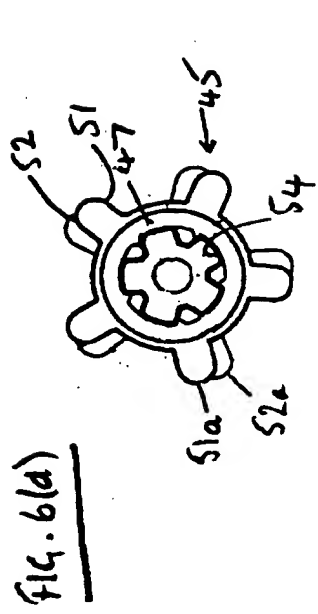


FIG. 4(b)










FIG. 7(a)




FIG. 7(b)




FIG. 7(c)

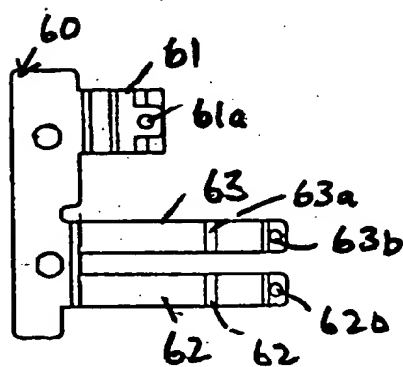


FIG. 8(a)

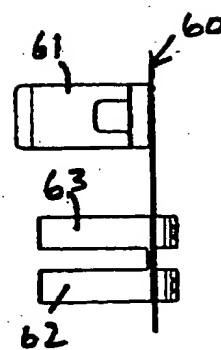


FIG. 8(b)













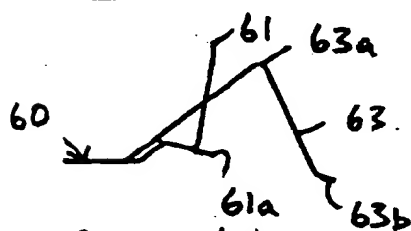


FIG. 8(c)

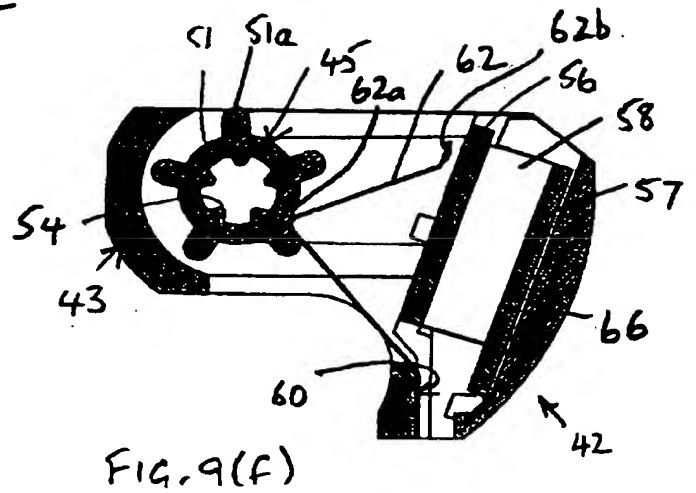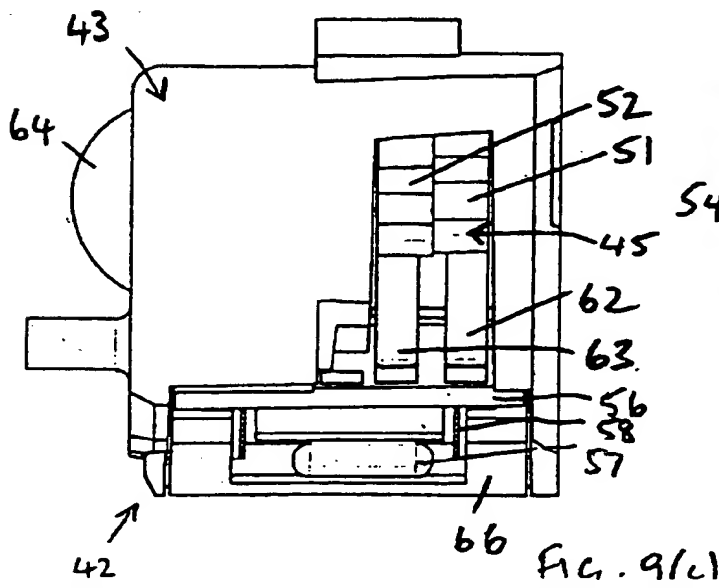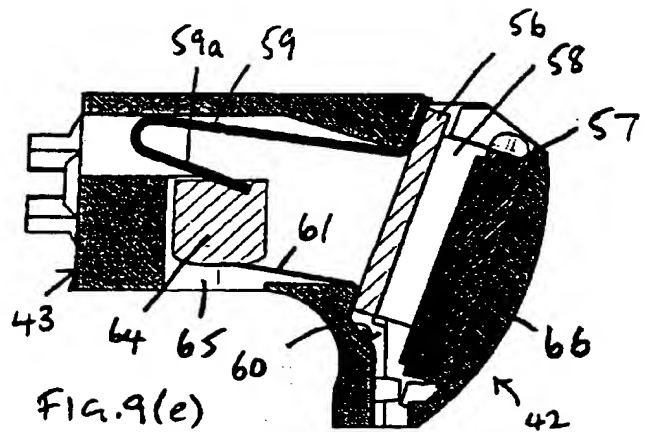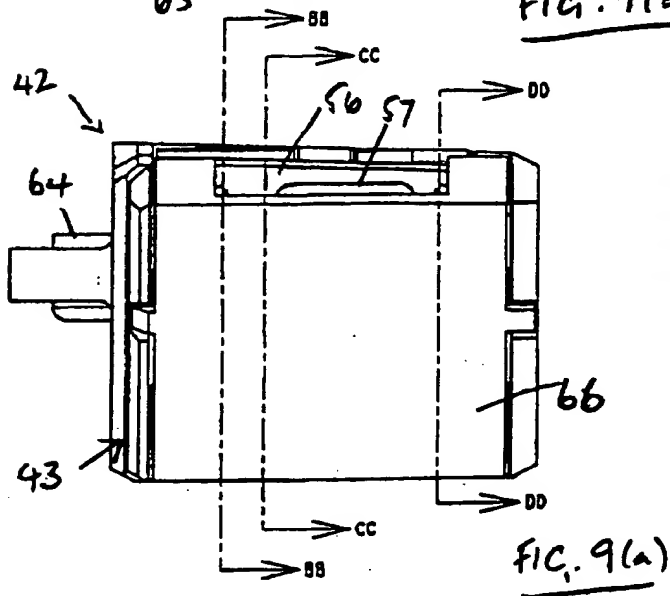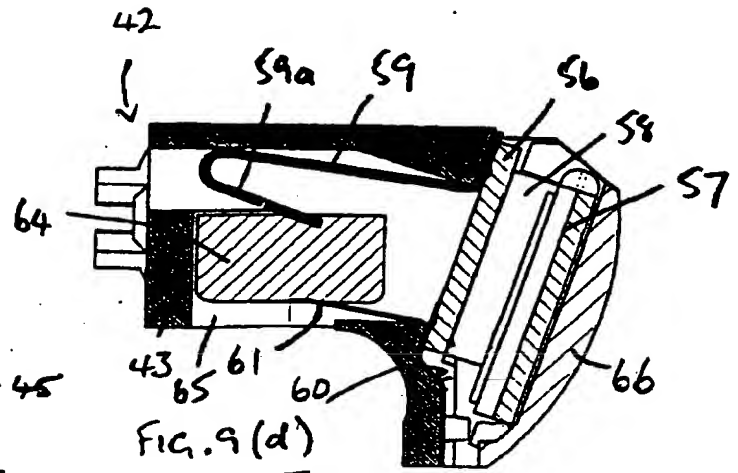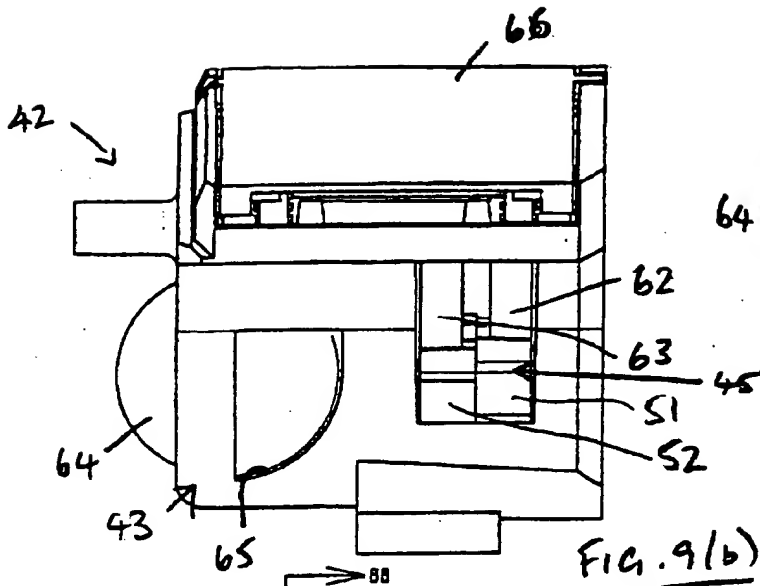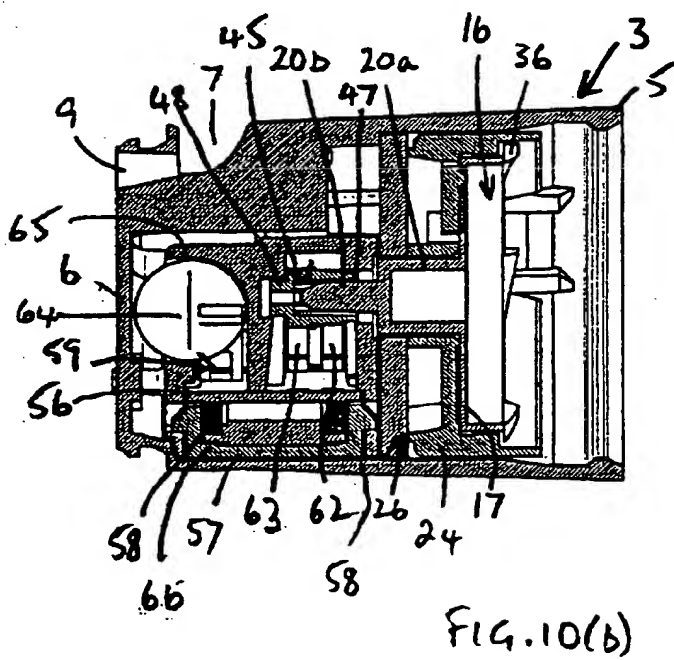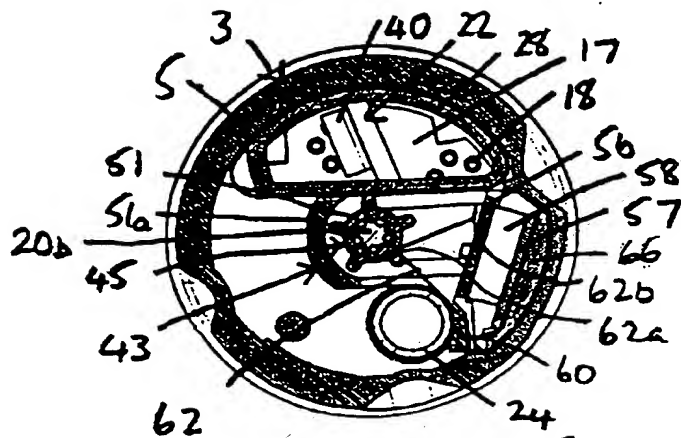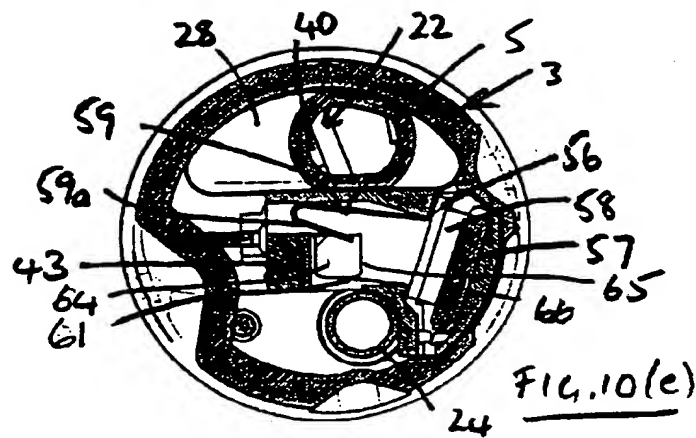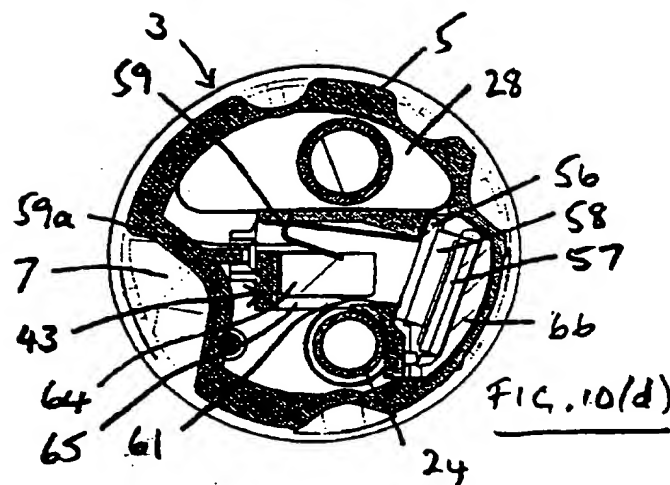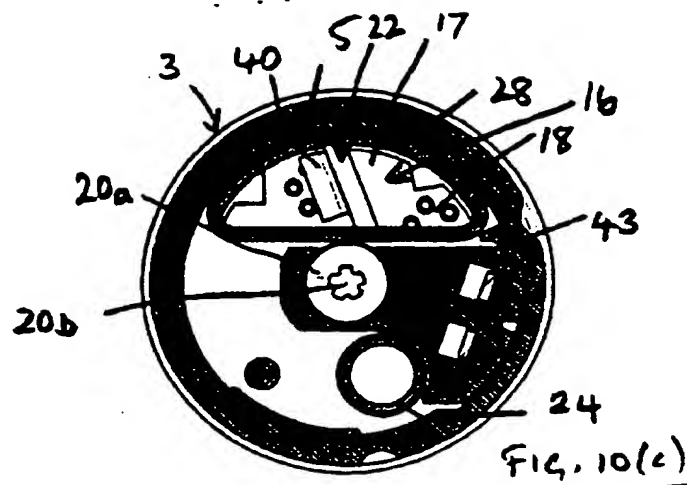

9/9

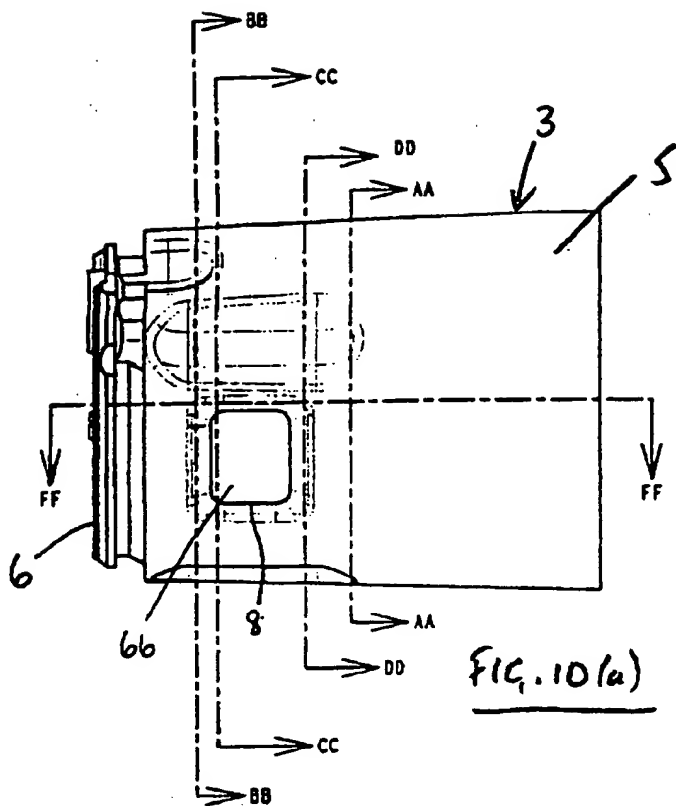

**THIS PAGE BLANK (USPTO)**